



Product Website

The perfect all-rounder for the office. The FlexScan EV2430-BK is your ideal assistant in the office for everyday work. This handy all-rounder features power managing functionality and an ergonomic design and it's easy on your eyes for long days in the office. It features three signal ports to connect to computers. In addition, there is a USB hub and headphone/audio jacks that are situated on the side of the monitor. Modern IPS technology enables the FlexScan EV2430-BK to offer horizontal and vertical viewing angles of 178°. Auto EcoView, the brightness sensor, prevents disruptive glaring and reduces strain on the eyes. It also detects changes in the ambient light, automatically adjusting the screen brightness throughout the course of the day.

- A 24-inch LCD monitor with 16:10 aspect ratio and LED technology in an ergonomic, space-saving design
- ✓ Contrast 1000:1, brightness 300 cd/m²
- Auto EcoView, EcoView Index, EcoView Sense, and EcoView Optimizer for maximum power savings and superb ergonomics
- Integrated speakers and headphone jack
- USB hub with one upstream and two downstream ports
- DisplayPort, DVI-D, and D-sub ports for digital and analogue connections
- 5-year warranty for highest investment security

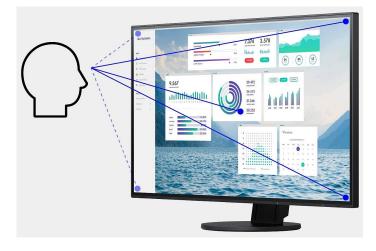


Image quality

Precise, high-contrast, bright and crisp screen

Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920 x 1200 pixels, maximum contrast of 1000:1, and stable brightness of up to 300 cd/m². That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.



Precise color control

An image can only be perfect if the colours are, too. This is why EIZO monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10 000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the gray-gray change takes only 14 ms on average. You can watch films and rapidly changing images without annoying afterglow.

Ergonomics Working in a relaxed manner

Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.



During the day



In the evening





FOR THE SAKE OF THE EYES


Flicker free

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience while maintaining picture quality and colour stability. In addition, compared to pure DC control, you can adjust the brightness to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

The flicker-free and low blue light content of the EIZO FlexScan monitors is certified by TÜV Rheinland.


Anti-glare coating: more image, less reflection

The EV2430 offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2430 effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the monitor, without having to sit in a forced position to prevent glare.

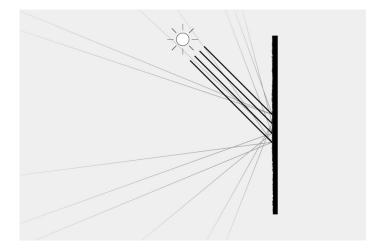


Ergonomic stand

Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment and can be lowered almost to the base plate of the stand, enabling you to position the top image line ergonomically right below your eye level.






Height 140 mm



Swivel 344°

Tilt Between 5° forwards and 35° backwards



Rotation clockwise



Variety of ports Best connectivity

One monitor, many ports


It couldn't be easier: Most end devices, such as PC, laptop, mouse, keyboard or headphones, can be connected directly to the monitor, thanks to its wide range of signal interfaces and ports. This makes your daily work easier and ensures a tidy desk.



Software and ease of use Features for greater comfort

Preset color modes: optimized display at the touch of a button

Pre-set color modes optimise the viewing of images, texts or films. Because it makes a difference whether you are watching a film, editing a picture, surfing the net, or writing texts. At the touch of a button, you set the respective pre-set for brightness, gamma correction and colour temperature. For example, the Paper mode simulates the pleasant contrast of printed paper, which is easy on the eyes when reading and prevents fatigue.

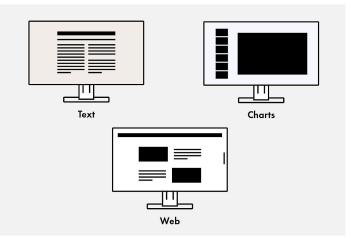

Sustainability Environmentally and socially conscious production

ECOVIEW OPTIMIZER Save up to 30% of energy

Save electricity without compromising quality: The Eco-View Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the color tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.





Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.3 watt in standby mode.

Socially responsible production

The EV2430 is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.



Environmentally and climate friendly

Each EV2430 is manufactured in our own factory, which implements an environmental and energy management system in accordance with ISO 14001 und ISO 50001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behavior among employees. We publicly report on these measures on an annual basis.



Warranty Highest investment security

Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative technology, made from high-end materials.





Technical Data

GENERAL

GENERAL	
ltem no.	EV2430-BK EV2430-GY
Case color	Black Light gray
Areas of application	Office
Product line	FlexScan
Areas of application	Large and medium-sized companies, Private user $\boldsymbol{\vartheta}$ small business, Finance
Specific system requirements	None, compatible with most computers and operating systems including macOS and Windows
EAN	4995047052999 4995047052982
SCREEN	
Screen size [in inches]	24.1
Screen size [in cm]	61.1
Format	16:10
Viewable image size (width x height) [in mm]	518 x 324
Ideal and recommended resolution	1920 x 1200
Pixel pitch [in mm]	0.27 × 0.27
Pixel density [in ppi]	94
Supported resolutions	1920 x 1200, 1680 x 1050, 1600 x 1200, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480
Panel technology	IPS
Max. viewing angle horizontal	178
Max. viewing angle vertical	178
Number of colors or greyscale	16.7 million colors (D-Sub, 8 Bit), 16.7 million colors (DV 8 Bit), 16.7 million colors (DisplayPort, 8 Bit)
Color palette/look-up table	1.06 billion color tones / 10 Bit
Max. color space (typical)	sRGB (100%)
Max. brightness (typical) [in cd/m²]	
	300
Max. dark room contrast (typical)	300 1000:1
Max. dark room contrast (typical) Response time grey-grey alternation (typical) [in ms]	1000:1
Max. dark room contrast (typical) Response time grey-grey alternation	1000:1 14
Max. dark room contrast (typical) Response time grey-grey alternation (typical) [in ms] Backlight CONNECTIONS	1000:1 14
Max. dark room contrast (typical) Response time grey-grey alternation (typical) [in ms] Backlight CONNECTIONS Signal inputs	1000:1 14 LED
Max. dark room contrast (typical) Response time grey-grey alternation (typical) [in ms] Backlight CONNECTIONS Signal inputs USB specification	1000:1 14 LED D-Sub, DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4)
Max. dark room contrast (typical) Response time grey-grey alternation (typical) [in ms] Backlight	1000:1 14 LED D-Sub, DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4) USB 2
Max. dark room contrast (typical) Response time grey-grey alternation (typical) [in ms] Backlight CONNECTIONS Signal inputs USB specification USB upstream ports	1000:1 14 LED D-Sub, DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4) USB 2 1 x type B
Max. dark room contrast (typical) Response time grey-grey alternation (typical) [in ms] Backlight CONNECTIONS Signal inputs USB specification USB upstream ports USB downstream ports	1000:1 14 LED D-Sub, DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4) USB 2 1 x type B 2x type A
Max. dark room contrast (typical) Response time grey-grey alternation (typical) [in ms] Backlight CONNECTIONS Signal inputs USB specification USB upstream ports USB downstream ports Graphic signal	1000:1 14 LED D-Sub, DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4) USB 2 1 x type B 2x type A DVI Single Link (TMDS), RGB Analog, DisplayPort

FEATURES & OPERATION

Preset color/greyscale modes	2x manual memory locations, sRGB, Paper, Movie
Auto EcoView	✓
EcoView Index	✓
EcoView Optimizer	✓
No flickering	✓
HDCP Decoder	✓
Automatic signal input recognition	✓
Built-in speakers	✓
On-screen menu languages	de, en, fr, es, it, se
Adjustment options	Color Mode, Brightness, Contrast, Color temperature /White point, Gamma, Colour tone, Color saturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume
Integrated power unit	✓
ELECTRICAL DATA	
Frequency	Display Port: 31-76 kHz/59-61 Hz; DVI-D: 31-76 kHz/59 61 Hz; D-Sub: 31-76 kHz/55-61 Hz;
Power consumption (typical) [in watts]	12
Maximum Power Consumption [in watts]	36 (at maximum brightness with all signal inputs and USB ports in use)
Max. Power consumption in stand-by mode [in watts]	0.3
Power consumption with power switch off [in watts]	0
Energy efficiency class	E
Energy consumption/1000h [in kWh]	15
Power supply	AC 100-120 V / 200-240 V, 50/60 Hz
Dimensions (incl. stand) (width x height x depth) [in mm]	553 x 368-499 x 233
Weight (incl. stand) [in kg]	6.7
Dimensions (without stand) (width x height x depth) [in mm]	553 x 358 x 57
Weight (without stand) [in kg]	4.3
Dimension drawing (PDF)	Dimension drawing (PDF)
Rotatability of the stand [in °]	344
Tiltability forwards/backwards [in °]	5 / 35
Pivot between portrait / landscape	clockwise
Height adjustment range [in mm]	140
Hole spacing	100 x 100
CERTIFICATION & STANDARDS	CE, UKCA, CB, TÜV/GS, TÜV/Ergonomics (including
Certification	CL, UNCA, CD, TUV/GO, TUV/ELGONOMICS (INCIUDING

Certification

CE, UKCA, CB, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Blue Low Light Content, TÜV/Flicker Free, RCM, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA ENERGY STAR, ROHS, WEEE, China ROHS, CCC



SOFTWARE & ACCESSORIES

Other box contents	Signal cable DVI-D - DVI-D, Signal cable DisplayPort - DisplayPort, Power cord, Quick guide
Accessories	РМ200-К
WARRANTY	
Warranty periode	5 years for unit and LCD module up to 30,000 opera- ting hours, whichever comes first.
Included warranty	Zero pixel defects guarantee; no fully illuminated sub- pixels (sub-pixels ISO 9241-307) for six months from date of purchase.

Find your EIZO contact: EIZO Europe GmbH Belgrader Straße 2 41069 Mönchengladbach Phone: +49 2161 8210-0 www.eizo.eu