FlexScan EV2480





→ Product Website

Experience in AR

The EV2480 offers the variety of advanced interfaces, including USB downstream ports, as well as USB-C upstream, DisplayPort and DMI inputs. The 70 W power supply via the USB-C port is highly practical. It is able to reliably charge small computers or laptops and can be easily and quickly connected with just one cable. The EV2480 is energy-efficient, ergonomic and reliable, and offers impressive image quality. The virtually frameless design gives the 23.8-inch monitor with 16:9 resolution the perfect image size for everyday use in the office. Antireflection technology and Auto EcoView ensure a glare-free view of the screen. The LCD featuring IPS technology ensures the greatest possible viewing angle. The brightness sensor, speakers and controls are built into the bezel. They are fully integrated into the monitor's design to offer an excellent user experience. The EV2480 can be swivelled, rotated and tilted to the position that is most comfortable for your back, neck and posture. Thanks to variable height adjustment, you can position the top image line ergonomically right below your eye level, which makes the EV2480 a pleasure to work with.

- 23.8" Full-HD LCD monitor with 16:9 aspect ratio and IPS technology for outstanding image quality
- USB-C port with DisplayPort signal channel and 70-watt power supply (max.) for the perfect connection
- Bezel only 1 mm: amazingly compact and ultra-elegant design
- Flicker-free image reproduction thanks to hybrid brightness control
- Auto EcoView and EcoView Optimizer deliver maximum power savings and superb ergonomics

- Optimised antireflection properties and flexible positioning
- ✓ USB 3.1 hub with one upstream and four downstream ports
- Signal inputs: USB Type-C (DisplayPort Alt Mode), DisplayPort, HDMI
- Proven manufacturing process that is both environmentally friendly and socially responsible
- 5-year warranty for highest investment security




Variety of ports Best connectivity

Cutting-edge connectivity with USB-C

A single USB-C cable is all that is needed to provide video and audio reproduction, transfer data quickly and supply power to the connected devices. The 70 W power supply via USB-C is highly practical and can reliably charge small computers or laptops. This creates more space on your desk since you no longer need an additional power supply for your computer.

For information on compatibility between PCs and FlexScan monitors when using a USB-C connection, please visit the EIZO Global website.

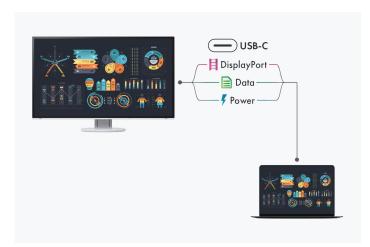

One monitor, many ports

It couldn't be easier: Most end devices, such as PC, laptop, mouse, keyboard or headphones, can be connected directly to the monitor, thanks to its wide range of signal interfaces and ports. This makes your daily work easier and ensures a tidy desk.




Design

A pleasing sight on any desk

Elegant design

The monitor's appearance can be the key to creating a pleasant working atmosphere. Whether you are at home or in the office, the monitor's virtually frameless design and ergonomic functionality allows it to fit naturally into your workplace environment. The housing is available in both an elegant black and in white, with matching white cables

Incidentally, the EV2480 is an ideal match for daisy-chain multi-screen systems with its sister model, the EV2490. The housing design and stand are identical.

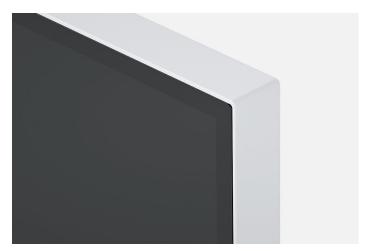





Controls integrated into bezel

Electrostatic switches are integrated into the front of the EV2480 instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.





Image quality Precise, high-contrast, bright and crisp screen

Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920 x 1080 (Full HD) pixels, maximum contrast of 1000:1, and stable brightness of up to 250 cd/m². That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with


LED backlight, contrasts and colours remain stable from every viewing angle.

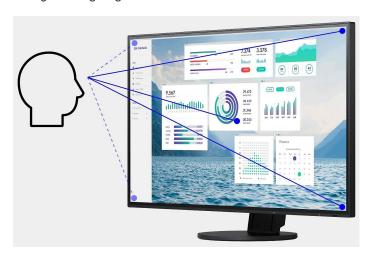

Precise color control

An image can only be perfect if the colours are, too. This is why EIZO monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10 000 K in 500-K intervals.







Look-Up-Table with 8 bit

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the gray-gray change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



Ergonomics

Working in a relaxed manner

Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.







In the evening

FOR THE SAKE OF THE EYES


Flicker free

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience while maintaining picture quality and colour stability. In addition, compared to pure DC control, you can adjust the brightness to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

The flicker-free and low blue light content of the EIZO FlexScan monitors is certified by TÜV Rheinland.


Anti-glare coating: more image, less reflection

The EV2480 offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2480 effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the monitor, without having to sit in a forced position to prevent glare.

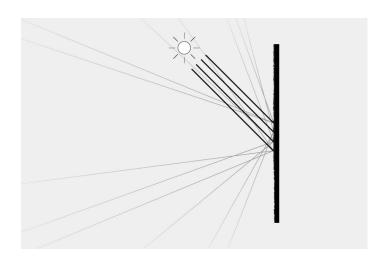


Ergonomic stand

Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment and can be lowered almost to the base plate of the stand, enabling you to position the top image line ergonomically right below your eye level.




Height 191.2 mm



Swivel 344°



TiltBetween 5° forwards and 35° backwards




Rotation clockwise and anti-clockwise



Software and ease of use Features for greater comfort


Preset color modes: optimized display at the touch of a button

Pre-set color modes optimise the viewing of images, texts or films. Because it makes a difference whether you are watching a film, editing a picture, surfing the net, or writing texts. At the touch of a button, you set the respective pre-set for brightness, gamma correction and colour temperature. For example, the Paper mode simulates the pleasant contrast of printed paper, which is easy on the eyes when reading and prevents fatigue.

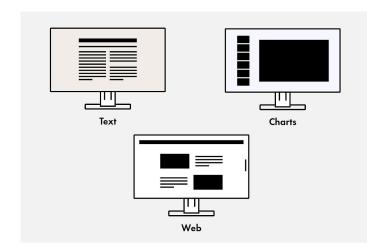

Operation made easy thanks to the Button Guide

With the Button Guide, you have all functions at a glance. One touch of the control panel is enough, and the function assignment of the buttons is displayed. Your advantage: clarity of operation and a clean, uncluttered design.

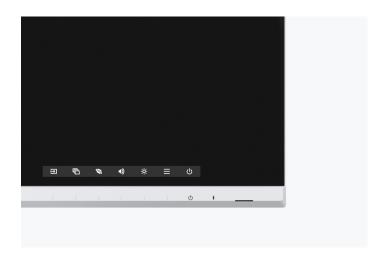

MONITOR CONTROL AND ADMINISTRATION

Screen InStyle


In addition to the on-screen menu, you can conveniently control the EV2480 by using the Screen InStyle software on a PC. The configuration options include color reproduction, energy saving options, and ergonomic functions. In multi-screen systems, the settings can be applied synchronously to all connected screens with Screen InStyle.

System administrators can centrally manage and control monitors connected in the network with Screen InStyle installed using the Screen InStyle Server application. This optimises power consumption and simplifies asset management of the monitors.

COMPANY-WIDE DEFAULT SETUP

Monitor Configurator

Workload reduction for administrators: The software allows you to create a default setup for all relevant monitor settings. This setup can be distributed to the connected monitors via the local network which facilitates the roll-out process.

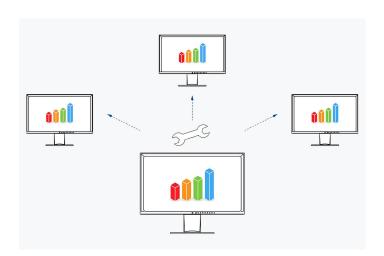



Sustainability

Environmentally and socially conscious production

ECOVIEW OPTIMIZER

Save up to 30% of energy

Save electricity without compromising quality: The Eco-View Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the color tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.



Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.

Socially responsible production

The EV2480 is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along

the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.



Environmentally and climate friendly

Each EV2480 is manufactured in our own factory, which implements an environmental and energy management system in accordance with ISO 14001 und ISO 50001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behavior among employees. We publicly report on these measures on an annual basis.





Sustainable and durable

The EV2480 is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2480 we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production.



A natural beauty

Reducing the use of volatile organic compounds (VOCs) found in material production, such as some paints, is a global concern.

Through years of research, EIZO has succeeded in achieving a smooth, nearly homogeneous color and texture in its monitor housings without the use of varnish.



Environmentally friendly packaging

For the packaging of the EV2480, EIZO uses a padding made of moulded pulp cellulose. The material is made from recycled cardboard and paper and has a much lower environmental impact when disposed of than traditional polystyrene or plastic. All cables are stored in a cardboard compartment instead of being individually packed in plastic bags.






Compliance with standards and guidelines

The monitor is certified to important and comprehensive sustainability standards such as TCO Certified Generation 9 and ENERGY STAR®. It also has an EPEAT Gold registration for compliance with strict sustainability standards at the highest level, which is even complemented by a Climate + award on science-based climate protection standards.

The EV2480 represents a safe investment if aspects such as ESG (environmental, social and corporate governance) or SDG (Sustainable Development Goals) of the United Nations are to be observed and required guidelines are to be complied with.



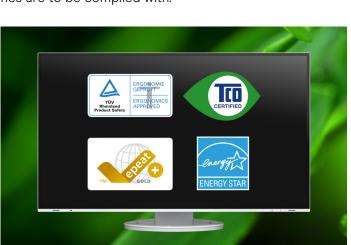

Warranty Highest investment security

Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative technology, made from high-end materials.







Technical Data

ЭE			
		А	

Item no.	EV2480-BK EV2480-WT
Case color	Black White
Areas of application	Office
Product line	FlexScan
Areas of application	Large and medium-sized companies, Private user $\boldsymbol{\vartheta}$ small business, Home Office, Finance
Specific system requirements	None, compatible with most computers and operating systems including macOS and Windows
EAN	4995047057758 4995047057765

SCREEN	
Screen size [in inches]	23.8
Screen size [in cm]	60.5
Format	16:9
Viewable image size (width x height) [in mm]	527 x 296,5
Ideal and recommended resolution	1920 x 1080 (Full HD)
Pixel pitch [in mm]	0.2745 x 0.2745
Pixel density [in ppi]	93
Supported resolutions	1920 x 1080 (Full HD), 1680 x 1050, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480
Panel technology	IPS
Max. viewing angle horizontal	178
Max. viewing angle vertical	178
Number of colors or greyscale	16.7 million colors (DisplayPort, 8 Bit), 16.7 million colors (HDMI, 8 Bit), 16.7 million colors (USB-C, 8 Bit)
Color palette/look-up table	1.06 billion color tones / 10 Bit
Max. color space (typical)	sRGB (100%)
Max. brightness (typical) [in cd/m²]	250
Max. dark room contrast (typical)	1000:1
Response time grey-grey alternation (typical) [in ms]	5
Backlight	LED

CONNECTIONS

CONNECTIONS	
Signal inputs	USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4)
USB specification	USB 5Gbps (USB 3)
USB upstream ports	1 x type C (DisplayPort Alt Mode, 70 W max.)
USB downstream ports	4x type A
Graphic signal	USB-C, DisplayPort, HDMI (RGB, YUV)
Audio input	USB-C, DisplayPort, HDMI
Audio / headphone output	3.5 mm stereo jack

FEATURES & OPERATION

/White point, Gamma, Overdrive, Colour tone, Colo saturation, Resolution, Scaling, OSD language, Signa input, All EcoView functions, Volume Button Guide	USB-C docking	✓
Auto EcoView EcoView Index Coverdrive V No flickering HDCP Decoder Automatic signal input recognition Built-in speakers On-screen menu languages de, en, fr, es, it, se Adjustment options Color Mode, Brightness, Contrast, Color temperatur/White point, Gamma, Overdrive, Colour tone, Colousaturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume Button Guide	Preset color/greyscale modes	
EcoView Index Coverdrive No flickering HDCP Decoder Automatic signal input recognition Built-in speakers On-screen menu languages de, en, fr, es, it, se Adjustment options Color Mode, Brightness, Contrast, Color temperature //White point, Gamma, Overdrive, Colour tone, Colous aturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume Button Guide	DICOM tone curve	✓
EcoView Optimizer Overdrive No flickering HDCP Decoder Automatic signal input recognition Built-in speakers On-screen menu languages de, en, fr, es, it, se Adjustment options Color Mode, Brightness, Contrast, Color temperature //White point, Gamma, Overdrive, Colour tone, Colous aturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume Button Guide	Auto EcoView	✓
Overdrive No flickering HDCP Decoder Automatic signal input recognition Built-in speakers On-screen menu languages de, en, fr, es, it, se Adjustment options Color Mode, Brightness, Contrast, Color temperatu //White point, Gamma, Overdrive, Colour tone, Colo saturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume Button Guide	EcoView Index	✓
No flickering HDCP Decoder Automatic signal input recognition Built-in speakers On-screen menu languages de, en, fr, es, it, se Color Mode, Brightness, Contrast, Color temperatur/White point, Gamma, Overdrive, Colour tone, Colosaturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume Button Guide	EcoView Optimizer	✓
HDCP Decoder Automatic signal input recognition Built-in speakers On-screen menu languages de, en, fr, es, it, se Color Mode, Brightness, Contrast, Color temperatu /White point, Gamma, Overdrive, Colour tone, Colo saturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume Button Guide	Overdrive	✓
Automatic signal input recognition Built-in speakers On-screen menu languages de, en, fr, es, it, se Color Mode, Brightness, Contrast, Color temperature //White point, Gamma, Overdrive, Colour tone, Colous aturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume Button Guide	No flickering	✓
Built-in speakers On-screen menu languages de, en, fr, es, it, se Color Mode, Brightness, Contrast, Color temperatu /White point, Gamma, Overdrive, Colour tone, Colo saturation, Resolution, Scaling, OSD language, Signa input, All EcoView functions, Volume Button Guide	HDCP Decoder	✓
On-screen menu languages de, en, fr, es, it, se Color Mode, Brightness, Contrast, Color temperature //White point, Gamma, Overdrive, Colour tone, Colour saturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume Button Guide	Automatic signal input recognition	✓
Adjustment options Color Mode, Brightness, Contrast, Color temperature, White point, Gamma, Overdrive, Colour tone, Colous asturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume Button Guide	Built-in speakers	✓
/White point, Gamma, Overdrive, Colour tone, Colo saturation, Resolution, Scaling, OSD language, Signa input, All EcoView functions, Volume Button Guide	On-screen menu languages	de, en, fr, es, it, se
	Adjustment options	Color Mode, Brightness, Contrast, Color temperature /White point, Gamma, Overdrive, Colour tone, Color saturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume
Integrated power unit	Button Guide	✓
integrated power unit	Integrated power unit	✓

ELECTRICAL DATA

Frequency	USB-C: 31-68 kHz/59-61 Hz; Display Port: 31-68 kHz/59- 61 Hz; HDMl: 49-51 Hz/59-61 Hz
Power consumption (typical) [in watts]	11
Maximum Power Consumption [in watts]	142 (at maximum brightness with all signal inputs and USB ports in use)
Max. Power consumption in stand-by mode [in watts]	0.5
Power consumption with power switch off [in watts]	0
Energy efficiency class	С
Energy consumption/1000h [in kWh]	12
Power supply	AC 100-120 V / 200-240 V, 50/60 Hz
Max. USB-C Power Delivery [in Watt]	70
Power management	✓





DIMENSIONS & WEIGHT

Dimensions (incl. stand) (width x height x depth) [in mm]	537,8 x 332,4 - 523,6 x 230
Weight (incl. stand) [in kg]	7.4
Dimensions (without stand) (width x height x depth) [in mm]	537,8 x 320,4 x 57,4
Weight (without stand) [in kg]	4.7
Dimension drawing (PDF)	Dimension drawing (PDF)
Rotatability of the stand [in °]	344
Tiltability forwards/backwards [in °]	5 / 35
Pivot between portrait / landscape	clockwise and anti-clockwise
Height adjustment range [in mm]	191.2
Hole spacing	100 x 100

CERTIFICATION & STANDARDS

Certification	CE, UKCA, CB, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TCO Certified Generation 9, EPEAT 2018 (US), TÜV/Blue Low Light Content, TÜV/Flicker Free, CTÜVUS, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA ENERGY STAR, ROHS, WEEE, China ROHS, CCC
EPEAT	EPEAT 2018 Gold (US), EPEAT Climate +

SOFTWARE & ACCESSORIES

Screen InStyle
USB/signal cable (USB-C - USB-C), Manual via download, Power cord, Quick guide
PM200-K, CP200, HH200PR-K, PP200-K, PCSK-03

WARRANTY	
Warranty periode	5 years for unit and LCD module up to 30,000 operating hours, whichever comes first.
Warranty type	Swiss Edition Warranty
Included warranty	Zero pixel defects guarantee; no fully illuminated sub- pixels (sub-pixels ISO 9241-307) for six months from date of purchase.



Experience the EV2480 in AR now!

Find your EIZO contact: EIZO AG - Switzerland Moosacherstrasse 6, Au 8820 Wädenswil ZH Phone +41 44 782 24 40