



[→ Product Website](#)

The FDF2382WT-A offers the highest picture quality in 16:9 format on a diagonal of 23". The impressive viewing angle of the IPS LCD module is particularly striking. The undistorted viewing from all angles is optimal for the widescreen format and touch operation, as all controls and information are equally visible. The FDF2382WT-A recognises up to 10 simultaneous touches and allows smooth and accurate stylus input. It ignores incorrect input, for example, from the palm of the hand.


- ✓ 23" touch monitor with 16:9 format and Full HD resolution
- ✓ Multi-touch operation (for example, zooming, scrolling, rotating, shifting)
- ✓ Smooth and accurate pen input with palm recognition
- ✓ Brightness 260 cd/m², contrast 1000:1
- ✓ IPS LCD module with wide viewing angles
- ✓ Flicker-free image reproduction
- ✓ DisplayPort, HDMI and D-Sub input for digital and analogue connection

Image quality

Precise, high-contrast, bright and crisp screen


Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920 x 1080 (Full HD) pixels, maximum contrast of 1000:1, and stable brightness of up to 260 cd/m². That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

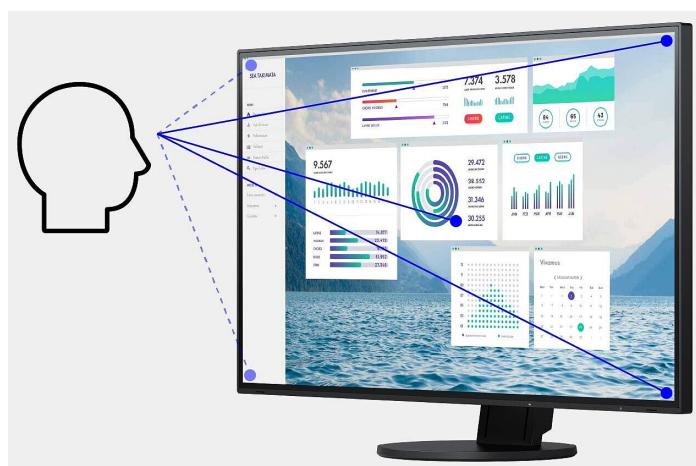


Precise color control

An image can only be perfect if the colours are, too. This is why EIZO monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10 000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

FOR THE SAKE OF THE EYES

Flicker free

The monitor is flicker-free at every brightness setting. This is great for users, as their eyes will not tire as quickly, allowing them to work in front of the screen for longer periods of time without fatigue.

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the gray-gray change takes only 11 ms on average. You can watch films and rapidly changing images without annoying afterglow.

Touch functionality

Operation with finger or touch-pen


Fine, precise stylus input

The FDF2382WT-A contains reliable capacitive touch technology (PCAP) that detects movements with very high precision. Hence you can easily capture even small writing and character input via the screen.



Frameless touchscreen


The display extends right up to the bezels – this means that the entire touch surface can be used without disruptions right up to the edges, which is particularly convenient for swiping and scrolling motions.

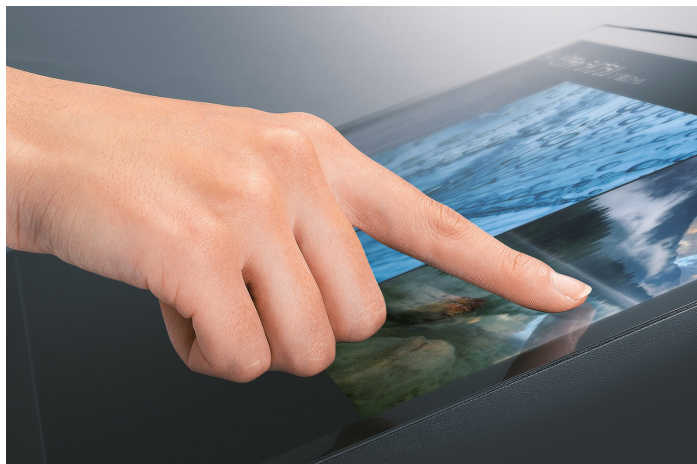

Multi-touch screen with robust surface

The monitor can detect up to ten simultaneous touches, which means that multiple individuals can operate the monitor at the same time. Furthermore, the touchscreen is equipped with hand ball recognition. While writing, users can place their hands or arms on the monitor without accidentally triggering an input.

With a hardness of 5H, the glass surface is insensitive to scratches and guarantees to recognize up to 50 million touches.

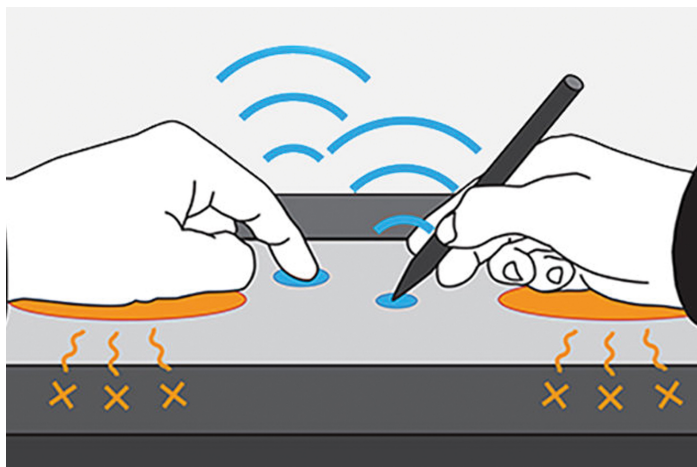

Touch detection and sensitivity

The monitor is equipped with technology that calibrates the touch sensitivity to minimise incorrect touch response due to environmental factors and electromagnetic noise. This ensures that the screen maintains accurate touch interaction during use.

Users can easily turn touch detection on or off by pushing the button conveniently located on the monitor's outer rim. A button is located on two sides of the monitor for easy access.



Touch operation without additional drivers

The multitouch interface is supported by standard Windows 11, 10 and 8.1 drivers. You can operate the touch panel without additional drivers by simply connecting the USB cable.


In addition to Windows standard touch drivers, a dedicated touch driver is also available to support touch interaction sounds and mouse emulation.

Easy to use

Features for greater comfort


Preset color modes: optimized display at the touch of a button

Preset color modes make it easier for you to work and view images, texts and videos. This is because when choosing color settings, it makes a difference whether you are looking at a film, editing an image, surfing the Internet or writing texts. You can configure the respective default settings for brightness, gamma correction and colour temperature at the press of a button.

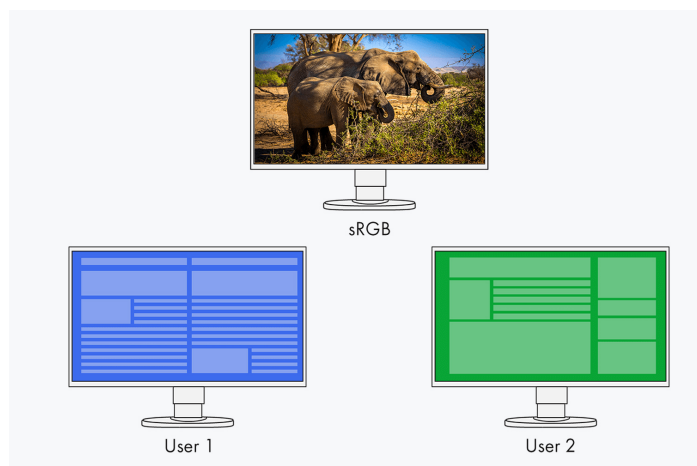

Reclining stand

The equipped stand provides flexible positioning to allow the monitor to rest on your desk like a laptop and recline back to your desired angle. This makes it easy to place the monitor in the ideal position for comfortable use in any environment.

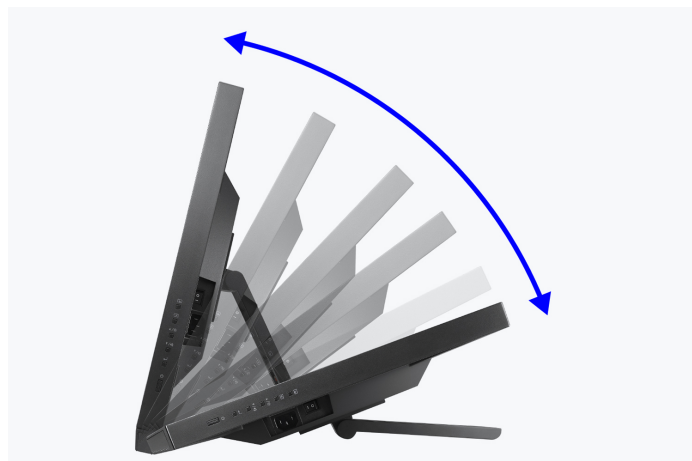

Tilt by moving the base: 15° - 70°

Variety of ports

Best connectivity

One monitor, many ports

It couldn't be easier: Most end devices, such as PC, laptop, mouse, keyboard or headphones, can be connected directly to the monitor, thanks to its wide range of signal interfaces and ports. This makes your daily work easier and ensures a tidy desk.



Durability **And reliability**

Three-year warranty

EIZO grants a three-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative technology, made from high-end materials.

24/7 use

The FDF2382WT-A is built for 24-hour use and is characterised by maximum reliability.



Sustainability **Environmentally and socially** **conscious production**

Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.

Socially responsible production

The FDF2382WT-A is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.



Environmentally and climate friendly

Each FDF2382WT-A is manufactured in our own factory, which implements an environmental and energy management system in accordance with ISO 14001 und ISO 50001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behavior among employees. We publicly report on these measures on an annual basis.



Sustainable and durable

The FDF2382WT-A is designed to have a long service life and normally outlasts the warranty period by some distance. Replacement parts are available many years after production has ceased. The entire lifecycle takes into account the impact on the environment as the longevity of the product and the fact it can be repaired saves resources and protects the environment. When designing the FDF2382WT-A, we took a minimalistic approach to our resources by using high-quality components and materials, as well as a careful production process.



Technical Data

| GENERAL | | FEATURES & OPERATION | |
|---|--|---|---|
| Item no. | FDF2382WT-A | Preset color/greyscale modes | 2x manual memory locations, sRGB |
| Case color | Black | HDCP Decoder | ✓ |
| Areas of application | Video surveillance, Industry | Automatic signal input recognition | ✓ |
| Product line | DuraVision | Built-in speakers | ✓ |
| Areas of application | Touch and video monitors, Automation, Video surveillance, Large and medium-sized companies, Private user & small business, Control rooms | On-screen menu languages | de, en, fr, es, it, se |
| EAN | 4995047063216 | Adjustment options | Color Mode, Brightness, Contrast, Color temperature /White point, Gamma, Overdrive, Colour tone, Color saturation, Resolution, Scaling, Touch function On/Off, OSD language, Signal input, Volume, Key lock |
| SCREEN | | Integrated power unit | ✓ |
| Screen size [in inches] | 23 | Touchscreen | ✓ |
| Screen size [in cm] | 58 | Touch panel type | Projected capacitive (PCAP) |
| Format | 16:9 | Touch compatible OS | Windows 8.1 (64-bit/32-bit), Windows 11, Windows 10 |
| Viewable image size (width x height) [in mm] | 509,2 x 286,4 | Touch points | 10 |
| Ideal and recommended resolution | 1920 x 1080 (Full HD) | ELECTRICAL DATA | |
| Pixel pitch [in mm] | 0,265 x 0,265 | Frequency | D-Sub: 31-81 kHz/55-76 Hz; Display Port: 31-68 kHz/59-61 Hz; HDMI: 31-68 kHz/59-61 Hz |
| Supported resolutions | 1920 x 1080 (Full HD), 1680 x 1050, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480 | Power consumption (typical) [in watts] | 12 |
| Panel technology | IPS | Maximum Power Consumption [in watts] | 47 (at maximum brightness with all signal inputs and USB ports in use) |
| Max. viewing angle horizontal | 178 | Max. Power consumption in stand-by mode [in watts] | 0.5 |
| Max. viewing angle vertical | 178 | Power consumption with power switch off [in watts] | 0 |
| Number of colors or greyscale | 16.7 million colors (D-Sub, 8 Bit), 16.7 million colors (DisplayPort, 8 Bit), 16.7 million colors (HDMI, 8 Bit) | Energy efficiency class | E |
| Color palette/look-up table | 1.06 billion color tones / 10 Bit | Energy consumption/1000h [in kWh] | 17 |
| Max. color space (typical) | sRGB (100%) | Power supply | AC 100-240V, 50/60Hz |
| Max. brightness (typical) [in cd/m²] | 260 | DIMENSIONS & WEIGHT | |
| Max. dark room contrast (typical) | 1000:1 | Dimensions (incl. stand) (width x height x depth) [in mm] | 556,7 x 144,9-353,9 x 216,3-401,3 |
| Response time grey-grey alternation (typical) [in ms] | 11 | Weight (incl. stand) [in kg] | 6.6 |
| Max. refresh rate [in Hz] | 60 | Dimensions (without stand) (width x height x depth) [in mm] | 556,7 x 339,2 x 54 |
| Backlight | LED | Weight (without stand) [in kg] | 6 |
| CONNECTIONS | | Dimension drawing (PDF) | Dimension drawing (PDF) |
| Touch port | USB | Tiltability forwards/backwards [in °] | 15 / 70 |
| Signal inputs | D-Sub, DisplayPort (HDCP 1.3), HDMI (HDCP 1.4) | Hole spacing | 100 x 100 |
| USB specification | USB 5Gbps (USB 3) | CERTIFICATION & STANDARDS | |
| USB upstream ports | 1 x type B | Operating temperature | 5 - 35 °C / 20 - 80 % (R.H., non condensing) |
| USB downstream ports | 2x type A | Certification | CE, UKCA, CB, RCM, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, RoHS, WEEE, China RoHS, CCC |
| Graphic signal | RGB Analog, DisplayPort, HDMI (RGB, YUV) | SOFTWARE & ACCESSORIES | |
| Control port | USB-Protocol | Other box contents | Signal cable HDMI - HDMI, USB cable (Type A - Type B), Signal cable DisplayPort - DisplayPort, Power cord, Quick guide |
| Sync formats | Separate | Accessories | PM200-K, CP200, PP100-K, TP5 |
| Audio input | 3.5 mm stereo jack, DisplayPort, HDMI | | |
| WARRANTY | | | |
| Warranty periode | 3 years | | |



DuraVision **FDF2382WT-A**

Find your EIZO contact:
EIZO Europe GmbH
Belgrader Straße 2
41069 Mönchengladbach
Phone: +49 2161 8210-0
www.eizo.eu

All product names are trademarks or registered trademarks of EIZO Corporation in Japan and other countries or their respective companies. Copyright © 2024 EIZO Europe GmbH, Belgrader Str. 2, 41069 Mönchengladbach, Germany. All rights, errors and modifications reserved. Latest update: 22.04.2024