



# S2133-GY

## Your advantages




The 21-inch EIZO S2133 display in 4:3 aspect ratio impresses with its IPS LCD and a modern, bright and energy-efficient LED backlight, which has up to 420 cd/m<sup>2</sup>. Typical power consumption is just 13 watts. The monitor also saves energy with Auto EcoView by intelligently adjusting the image brightness to the environment. The EcoView Optimizer regulates the backlight according to image content thus reducing power consumption at the same time. The S2133 means maximum user convenience, reduced impact on the environment and minimal operating costs. It is targeted at companies and government agencies, but also attracts interest whenever a high-quality monitor is required.

- ✓ 4:3 format and IPS LCD in a compact and space-saving design
- ✓ Brightness 420 cd/sq m, contrast 1500:1, 178° viewing angle
- ✓ 6 ms grey-grey switching time with overdrive function
- ✓ Auto-EcoView, EcoView Index, and EcoView Optimizer for maximum energy-saving and optimal ergonomics.
- ✓ USB hub with one upstream and two downstream connections
- ✓ Display Port, DVI-D, and D-sub inputs for digital and analogue connection

## Features

### Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1600 x 1200 pixels, maximum contrast of 1500:1, and stable brightness of up to 420 cd/m<sup>2</sup>. That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

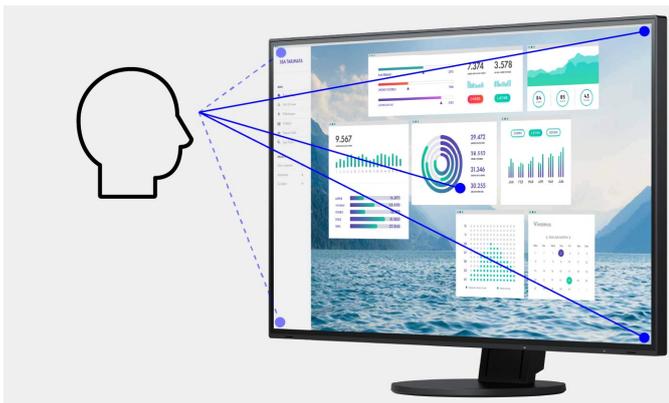

### 10-bit LUT: precise colour control

An image can only be perfect if the colours are, too. This is why EIZO office monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.



Without 10 Bit LUT



With 10 Bit LUT

### Save electricity and your eyes with Auto EcoView

Brilliant in all light conditions: The Auto EcoView function adjusts the brightness of the monitor to the changing ambient light fully automatically by using a sensor. In bright light, it increases image brightness; at darker times, it reduces it. The benefits: Annoying glare is reduced, objects on the monitor will be easier to perceive, and your eyes will not get tired as quickly.

Of course, it is also possible to control the monitor manually. EcoView Index is used for orientation on how environmentally friendly your settings are. In this way, you can control your electricity consumption yourself.

### Anti-reflection coating: more image, less reflection


The S2133 offers an optimally anti-glare surface. By minimising reflections through the diffusion of reflected light, the S2133 effectively prevents glare and eyestrain. Eye fatigue is reduced and a comfortable sitting position is made possible without having to adopt a forced position to avoid glare and reflections.

### Flicker-free working

The monitor is flicker-free at every brightness setting. The benefit: Your eyes do not get tired as quickly. You can work on the screen for an extended period.

### Preset colour modes: optimised display at the touch of a button

Pre-set colour modes optimise the viewing of images, texts or films. Because it makes a difference whether you are watching a film, editing a picture, surfing the net, or writing texts. At the touch of a button, you set the respective pre-set for brightness, gamma correction and colour temperature. For example, the Paper mode simulates the pleasant contrast of printed paper, which is easy on the eyes when reading and prevents fatigue.

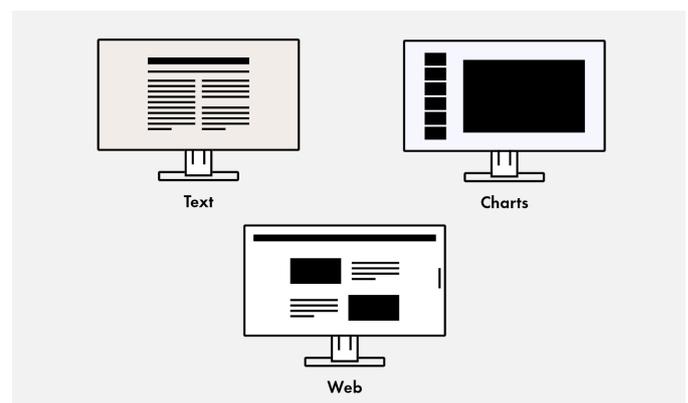

### Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 6 ms on average. You can watch films and rapidly changing images without annoying afterglow.

## Features

### Save up to 30% of energy with the EcoView Optimizer

Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.

### LED backlight: Economical in consumption, free from mercury

The monitors with an LED backlight help save the environment throughout their entire service life – from manufacturing through operation to disposal. For on the one hand they are characterized by particularly low electricity consumption. The typical consumption is just 13 Watt. On the other hand, they are free from mercury – a substance that is harmful to both humans and the environment and is very difficult to dispose of.




### One monitor, many ports


It doesn't get easier than this: You can connect most of your devices, such as PC, laptop or cameras directly to the monitor because the monitor has a number of different ports. That makes your daily work easier.

### Flexible base

Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment, enabling you to position the top image line ergonomically right below your eye level.



Height  
82 mm



Tilt  
Tilt up 40°, tilt down 0°



Swivel  
35° right, 35° left



Rotation  
Rotation 90° clockwise

### Five-year warranty

EIZO grants a five-year warranty.\* This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.

\* in Belgium: including on-site replacement service



# Specification

## General

Item no.	S2133-GY
Case color	Light grey
Areas of application	Office
Product line	FlexScan
EAN	4995047043072
Variants	<a href="#">S2133-BK</a> (Colour: Black)

## Display

Screen size [in inches]	21.3
Screen size [in cm]	54
Format	4:3
Viewable image size (width x height)	432 x 324
Ideal and recommended resolution	1600 x 1200
Pixel pitch [mm]	0.27 x 0.27
Resolution supported	1600 x 1200, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480
Panel technology	IPS
Max. viewing angle horizontal	178 °
Max. viewing angle vertical	178 °
Number of colours or greyscale	16.7 million colours (DisplayPort, 8 Bit), 16.7 million colours (DVI, 8 Bit), 16.7 million colours (D-Sub, 8 Bit)
Colour palette/look-up table	1.06 billion colour tones / 10 Bit
Max. colour space (typical)	sRGB
Max. brightness (typical) [in cd/m <sup>2</sup> ]	420
Max. dark room contrast (typical)	1500:1
Response time grey-grey alternation (typical) [in ms]	6
Max. refresh rate [in hertz]	60
Backlight	LED

## Features & control

Preset colour/greyscale modes	sRGB, Paper, Movie, DICOM, 1x free mode for user selection
Auto EcoView	✓
EcoView Index	✓
EcoView Optimizer	✓
Overdrive	✓
HDCP Decoder	✓
Input signal identification	✓
OSD language	de, en, fr, es, it, se, ja, zh
Adjustment options	Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature/White point, Colour Mode, Colour tone, Signal input, Overdrive, Resolution, Scaling, OSD language, Scaling
Integrated power unit	✓

## Ports

Signal inputs	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-sub
USB specification	USB 2.0
USB upstream ports	1 x type B
USB downstream ports	2 x type A
Video signal	DisplayPort, DVI (TMDS), RGB Analog
Sync formats	Separate, Composite

## Electric data

Power consumption (typical) [in watt]	13
Maximum Power Consumption [in watt]	45
Power Save Mode [in watt]	0.3
Power consumption off [in watt]	0
Energy efficiency class	E
Energy consumption/1000h [in kWh]	17
Power supply	AC 100-120 V / 200-240 V, 50/60 Hz

## Dimensions & weights

Dimensions [mm]	465 x 453-535 x 209
Weight [in kilograms]	8.6
Dimensions without stand [mm]	465 x 361 x 64
Weight without stand [in kilograms]	5.6
Housing dimension details	<a href="#">Dimension drawing (PDF)</a>
Swivel	35 °
Incline forward/backward	0 ° / 40 °
Pivot	✓ 90°
Height adjustment range [mm]	82
Hole spacing	VESA standard 100 x 100 mm

## Certification & standards

Certification	CE, CB, EPA ENERGY STAR <sup>®</sup> , TÜV/GS, TÜV/Ergonomics (including ISO 9241-307)***, EPEAT 2018 (US), cTÜVus, EAC, FCC-B, CAN ICES-3 (B), RCM, CCC, RoHS, China RoHS, WEEE
---------------	--

## Software & accessories

Additional supply	Power cord, Signal cable DVI-D - DVI-D, Signal cable D-sub - D-sub, USB 2.0 cable, Quick guide, EIZO LCD Utility Disk (incl. PDF manual)
Accessories	EIZO ScreenCleaner (for the best possible clean without scratching the monitor), PM200-K (DisplayPort cable to transfer digital video and audio signals.)

## Warranty

Warranty and service	5 years warranty*
----------------------	-------------------

## Terms

\*) Maximum of 30,000 hours of operation from the date of purchase.