


## FDS1904T

### Your advantages

---

The FDS1904T was developed for ECDIS and radar systems. It has impressive optimal legibility when used on the bridge. It satisfies the requirements in terms of temperature, air humidity and vibration set out in the international standard for navigation and radio communication devices for shipping (IEC 60945).



## Features

### Approved by classification companies

The monitor fulfills the requirements of the following classification companies: GL (Germany), BV (France), LR (UK), DNV (Norway), ABS (USA), ClassNK (Japan), KR (Korea) and CCS (China).

### Large viewing angle thanks to VA technology

The VA panel offers a high contrast ratio and a very large viewing angle on the image. The contrast and colours of the image remain the same from almost every viewing angle. The anti-reflection coating also reduces annoying reflections, even when looking at the monitor from the side.

### Flicker-free images

The monitor is fitted with LED backlighting to control brightness and prevent flickering. This places far less strain on the eyes when the screen is being observed for extended periods of time.

### 24/7 use guaranteed

The monitor is built for 24-hour use and is impressively reliable. That is why EIZO gives a 3 years warranty.

### Reliable on the high seas

Heat, cold, vibration – the monitor is able to withstand the permanent strains of the maritime environment. It fulfills the IEC 60945 device standard for the fields of the environment and electromagnetic compatibility required for the licensing of maritime equipment. It also boasts an IP65 rating, and is even protected against dust and hose water getting into it. Other properties: A special coating protects the electronics from moisture. And the ventilator of the monitor can be accessed easily for a simple replacement.



### High colour accuracy for ECDIS

The monitor's gamma, brightness, and RGB colour space are calibrated in the factory. The colour rendering and display precisely fulfills the specifications of the ECDIS system and RADAR application in accordance with the IEC 61174, IEC 62288, and IEC 62388 standards.



### Large dimming range for changing light conditions

Suitable for day and night operation: Thanks to the wide dimming range from less than 1 cd/m<sup>2</sup> to 540 cd/m<sup>2</sup>, the monitor is ideally suited to changing light conditions. This means that the brightness of the monitor can be optimally configured for all ambient lighting and can be used without problems even in dark rooms.




## Features

---

### Touchscreen: fast and secure

Thanks to the capacitive touchscreen, the monitor can be operated using a finger or touch pen. Typing, dragging, rotating, minimising – everything works quickly and directly. In addition, it is highly resistant to dust and water droplets, preventing unintentional entries.

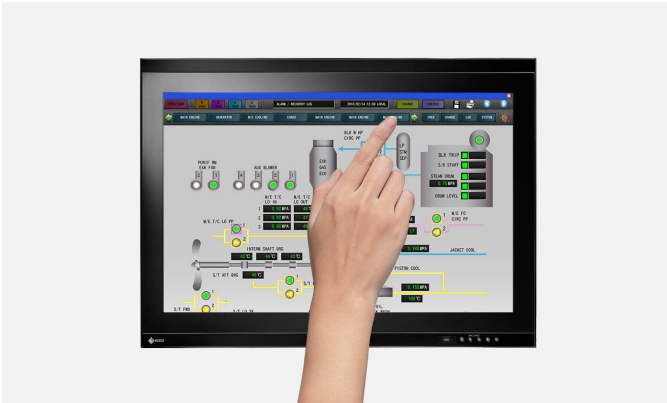

# Specification

## General

Item no.	FDS1904T
Case color	Black
Areas of application	Industry
Product line	DuraVision
Variants	<a href="#">FDS1904</a> (Touchscreen: no)

## Display

Screen size [in inches]	19
Screen size [in cm]	48
Visible size diagonal [mm]	481
Format	5:4
Viewable image size (width x height)	376 x 3
Ideal and recommended resolution	1280 x 1024
Pixel pitch [mm]	0.29 x 0.29
Panel technology	VA
Max. viewing angle horizontal	178 °
Max. viewing angle vertical	178 °
Number of colours or greyscale	16.7 million colours (DVI, 8 Bit), 16.7 million colours (D-Sub, 8 Bit)
Max. brightness (typical) [in cd/m <sup>2</sup> ]	540
Max. dark room contrast (typical)	2000:1
Response time black-white-black alternation (typical) [in ms]	10 / 10
Backlight	LED

## Features & control

Preset colour/greyscale modes	Day, Dusk, Night, 1x free mode for user selection
OSD language	en
Adjustment options	Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature/White point, Colour Mode, Colour tone, Signal input, , Key lock, Backlight off mode, Alignment, ECDIS indicator, Power indicator, Signal info
Integrated power unit	✓
Touchscreen	✓
Touch panel type	Projected capacitive (PCAP)
Touch compatible OS	Windows 8.1 (64-bit/32-bit), Windows 8 (64-bit/32-bit),
Touch points	5

## Ports

Touch port	D-sub (male), USB Upstream
Signal inputs	DVI-D, D-sub
Video signal	DVI (TMDS), RGB Analog

## Electric data

Maximum Power Consumption [in watt]	64
Power supply	AC: Rating AC 100 - 240 V (Operating: AC 85-264 V), 50/60 Hz, 0,65 A (AC 100 V) / 0,3 A (AC 200 V); DC: Rating DC+24 V (Operating: +30 % / -10 %), 2,7 A (DC 24 V)
Power management	✓

## Dimensions & weights

Dimensions without stand [mm]	429 x 406 x 75
Weight without stand [in kilograms]	6.4
Housing dimension details	<a href="#">Dimension drawing (PDF)</a>
Hole spacing	VESA standard 100 x 100 mm

## Certification & standards

IP rating	IP65 (rear IP22)
Compass Safe Distance	Standard compass: 0,95 m, Steering compass: 0,6 m
Certification	Ship Classification: LR (UK), NK (Japan), ABS (USA), DNV (Norway), CB, CE, RoHS, WEEE, China RoHS, IEC60945, IEC62288, IEC61174, KC (K60950-1), K00022, K00024

## Software & accessories

Accessories	MDS-T191 (Stand for 19-inch Maritime Monitors)
-------------	--

## Warranty

Warranty and service	3 years
----------------------	---------